

# SMT-1935

19" LED Monitor




## Key Features

- Support up to 1,280 x 1,024 resolution
- High contrast ratio 1,000 : 1
- Fast response time 5ms
- Video input : HDMI, VGA, BNC

## Dimensions

Unit : mm (inch)

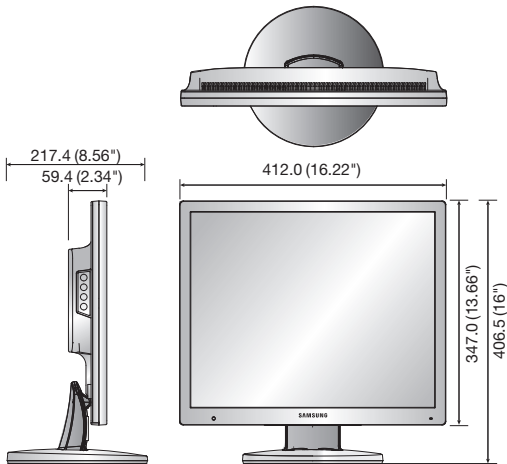

## SMT-1935

DISPLAY		
Type	LED	
Screen Size	19"	
Max. Resolution	1,280 x 1,024	
Brightness	250cd/m <sup>2</sup>	
Contrast Ratio	1,000 : 1	
Aspect Ratio	4 : 3	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	5ms	
Video System	NTSC / PAL	
Panel Life	30,000 hours	
Filter Type	3D combfilter	
INTERFACE		
Video	Connector	BNC type (2 in / 2 out)
	Connector	1 Analog RGB 15-pin D-sub
	Input Signal	0.7Vpp ±5%
VGA	Available Format	720 x 400@70Hz
		640 x 480@60Hz/72Hz/75Hz (VGA)
		800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)
		1,024 x 768@60Hz/70Hz/75Hz (XGA)
		1,152 x 864@75Hz
		1,280 x 720@60Hz
		1,280 x 960@60Hz
HDMI	Available Format	1,280 x 1,024@60Hz/75Hz (SXGA)
		1 HDMI input (Type A connector)
		640 x 480p@60Hz, 720 x 480i@60Hz
Audio	Output Signal	720 x 480p@60Hz, 720 x 576i@50Hz
		720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz
		2 RCA type (2 stereo inputs)
Application Support	Speakers : 2 x 1W	
Application Support	Remote controller	
ON SCREEN DISPLAY		
Functions	VESA™ DPM compatible	
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic	
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	Max. 22W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	412.0 x 406.5 x 217.4mm (16.22" x 16" x 8.56")
	Dimensions without Stand (WxHxD)	412.0 x 347.0 x 59.4mm (16.22" x 13.66" x 2.34")
	Weight	4.78Kg (10.54 lb)
	Protection Glass	Yes
	Cabinet Color	Black
	Wall Mounts	Optional
VESA Mounts Interface	100 x 100mm (3.94" x 3.94")	

\* The latest product information / specification can be found at [www.samsungsecurity.com](http://www.samsungsecurity.com)